

MI 2.0mm – 6.0mm Granulated Rubber


Product Description

MI 2.0mm – 6.0mm granulated rubber is predominantly used as shockpad material for artificial pitches; can also be applied to other products in a loose or bonded form.

Particle Grading

Sample	Sieve Size (mm)										
	0.000	0.500	1.000	2.000	2.500	3.150	4.000	5.000	6.300	7.100	8.000
	% Passing										
1	0	0	0	0	1	9	34	67	92	99	100
2	0	0	0	0	1	8	31	65	92	99	100
3	0	0	0	0	1	11	40	73	95	99	100
Mean	0	0	0	0	1	9	35	68	93	99	100

Particle Size Distribution

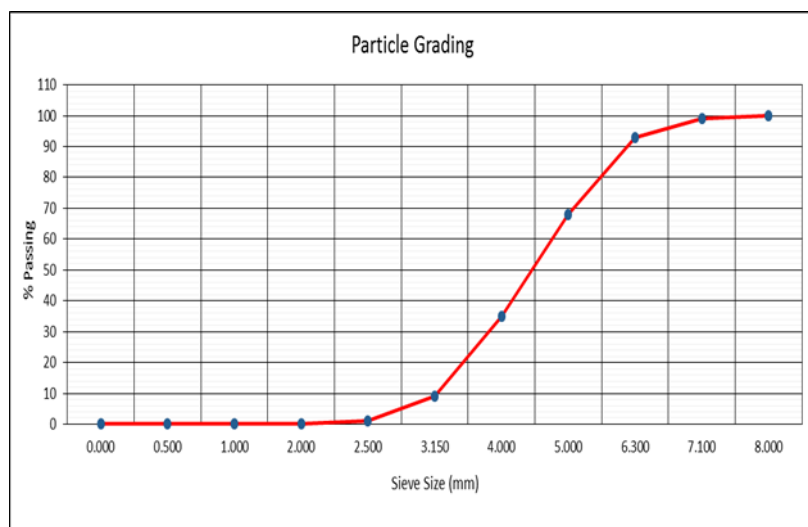


Test Results

Test	Standard	Result
Rubber Hydrocarbon Content	BS 7164-13	50-60%
Acetone Extract	BS ISO 1407	5-15%
Carbon Black Content	BS 7164-14	25-35%
Ash Content @ 550°C	BS ISO 247	5-15%
Sulphur Content	In-house acid digestion method & ICP-OES	50-70
Indentation Hardness	BS ISO 48	60-75
Uncompacted Bulk Density	BS EN 1097-3	0.46g/cm ³

Particle Shape & Bulk Density

Sample	Particle Shape		Bulk density (g/cm ³)
	Description	Classification	
1	Irregular	A3	0.46
2	Irregular	A3	0.46
3	Irregular	A3	0.46
Mean	Irregular	A3	0.46



Packaging

Available in bulk bags or 25kg bags.

#PremiumGranulatedRubber